

- Lowest Cost of Ownership
- Best-in-Class Efficiency
- Rugged & Reliable Design

STEAM MODELS:

2,070 - 16,387 lbs/h Output F&A 212°F ASME Section IV & I Designs to 300psi

Fulton

HOT WATER MODELS: 2 MM - 15.9 MM Btu/hr ASME Section I & IV Designs

FBS

Horizontal Firetube Boiler (Steam or Hot Water)

Fulton

in the second se

60 – 475 внр

PREMIER HORIZONTAL FIRETUBE

Fulton's FBS is a high quality horizontal firetube boiler. With more than 10,000 boilers sold in more than 40 countries, the FBS has proven itself time and again for customers around the world.

All FBS boilers are factory packaged with and integrated boiler, burner, and control package configured to provide the industry's lowest cost of ownership.

- Capable of Meeting All Emission Standards
- Trim Options for Virtually Any User Requirement
- Customizable Controls
- Burner Packages for Multiple Fuel Types

LOWEST TOTAL COST OF OWNERSHIP


The true cost of a boiler is measured over decades of use and includes lifetime operating and maintenance expenses. Fulton's FBS is designed with standard features to ensure it lasts longer, reduces downtime, and increases your overall system efficiency.

Highest Efficiency Low Operating Costs Minimal Maintenance Longest Boiler Life TOTAL COST \$

REDUCE OPERATING COSTS & EMISSIONS



With 3-pass and 4-pass designs, the FBS provides complete and efficient combustion with a **best-in-class 82% efficiency**.

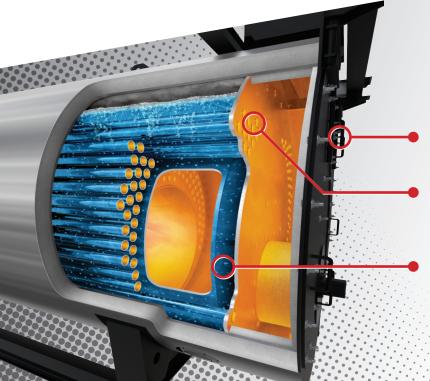

MINIMIZE YOUR MAINTENANCE

Standard davited front and rear doors provide easy fire-side access for simplified service.

Seal-welded boiler tubes at front and rear of boiler eliminate the potential for leaks and reduces maintenance requirements.

Fully water-backed rear turnaround eliminates maintenance and down time associated with refractory doors.

RUGGED DESIGN FOR LONGER LIFE

The FBS is built to last with pressure vessel thicknesses exceeding ASME minimums. Thick-wall tubes are 26% thicker than the industry standard (0.12" versus 0.095").

Each pressure vessel is backed by Fulton's **industry leading 5-year warranty** on material and workmanship.

Fulton

۲

3-Pass & 4-Pass Designs

The FBS design is fully water-backed to maximize heat transfer, providing the highest efficiencies possible.

Minimal Heat Losses

B

C

D

D

Thick, high-density insulation provides lower jacket temperatures and minimizes heat loss.

Integrated Economizer Support

All FBS boilers include a heavy-duty economizer bracket which supports up to 3,000 pounds.


High Quality Steam

The FBS features a large water content and generous steam volume which produce high quality dry steam.

A1

SPECIFICATIONS & DIMENSIONS

| | MODEL | FBS-60 | FBS-100 | FBS-150 | FBS-200 | FBS-250 | FBS-300 | FBS-350 | FBS-400 | FBS-475 |
|------------------------------|--------|--------|---------|---------|---------|---------|---------|---------|---------|---------|
| SPECIFICATIONS | | | | | 1 | I | | | I | |
| Unit Size | BHP | 60 | 100 | 150 | 200 | 250 | 300 | 350 | 400 | 475 |
| Steam Output | LBS/HR | 2,070 | 3,450 | 5,175 | 6,900 | 8,625 | 10,350 | 12,075 | 13,800 | 16,388 |
| Input | kBTU | 2,450 | 4,083 | 6,124 | 8,166 | 10,207 | 12,248 | 14,290 | 16,331 | 19,393 |
| Approximate Shipping Weight | LBS | 11,000 | 11,400 | 14,500 | 20,300 | 25,600 | 28,880 | 29,700 | 37,100 | 37,500 |
| Approximate Flooded Weight | LBS | 18,206 | 20,666 | 22,764 | 24,220 | 29,800 | 38,400 | 45,826 | 47,055 | 47,055 |
| Water Content | GAL | 864 | 999 | 1,084 | 1,169 | 1,408 | 1,805 | 2,034 | 2,163 | 2,163 |
| DIMENSIONS | | | | | | | | | | |
| (A) Base Length | IN | 163.5 | 148.5 | 181.5 | 174.5 | 208.75 | 257.5 | 248.5 | 278.75 | 278.75 |
| (B) Overall Width | IN | 91.5 | 91.5 | 94.25 | 94.25 | 101.25 | 101.25 | 104.25 | 104.25 | 104.25 |
| (C) Base Width | IN | 57.5 | 57.5 | 57.5 | 57.5 | 61.75 | 61.75 | 67 | 63 | 63 |
| (D) Height | IN | 86.75 | 86.75 | 92.5 | 92.5 | 100.5 | 100.5 | 100.5 | 100.5 | 100.5 |
| (E) Tube Pull Length | IN | 120 | 137 | 151 | 163 | 176 | 212.5 | 212.5 | 236 | 236 |
| (F) Main Steam Outlet (150#) | IN | 3 | 4 | 4 | 4 | 6 | 6 | 6 | 6 | 8 |
| (G) Flue | IN | 12 | 12 | 14 | 16 | 20 | 20 | 20 | 22 | 22 |

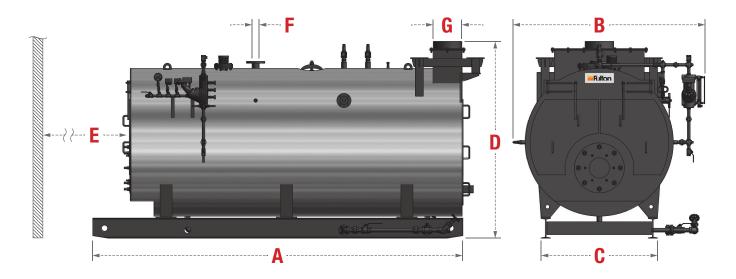

STEAM MODELS: 2,070 - 16,387 lbs/h Output F&A 212°F ASME Section IV & I Designs to 300psi HOT WATER MODELS: 2 MM - 15.9 MM Btu/hr ASME Section I & IV designs **NOTE:** Specifications and dimensions are approximate and for reference only. Fulton practices continuous product improvement and reserves the right to change specifications and/or dimensions without notice.



Call: (315) 298-5121

972 Centerville Road Pulaski, NY 13142





www.fulton.com